

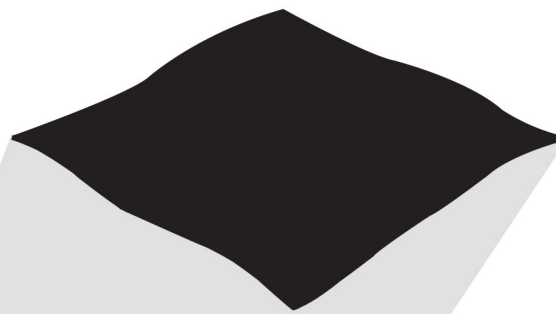







Root Barrier



- Protects roofing assembly and building from root penetration
- Available in two thicknesses: 20 mil and 30 mil
- High tear and puncture resistance
- Virgin-blended linear polyethylene
- Carbon black provides UV protection
- Flexible to conform to a variety of surfaces
- Double-sided and single-sided BUTYL tape available for a waterproof seal

AVAILABLE SIZES

	SIZES
RB20	508 sq ft & 762 sq ft
RB30	508 sq ft & 762 sq ft

TEST REPORT

	UNIT	RB20	RB30	TESTING METHOD
TENSILE STRENGTH @ BREAK 1"	lbs	75	142	ASTM D-6693
ELONGATION @ BREAK	%	800	800	ASTM D-6693
TEAR RESISTANCE	lbf	11	16	ASTM D-1004
HYDROSTATIC RESISTANCE	psi	100	170	ASTM D-751
PUNCTURE RESISTANCE	lbf	30	45	ASTM D-4833
VOLATILE LOSS	%	<1	<1	ASTM D-1203
DIMENSIONAL STABILITY	%	<2	<2	ASTM D-1204
PERM RATING	U.S. Perms	0.041	0.031	ASTM E-96